

A-1600-LB6 GREASE SYSTEM



Phone: 403-529-9645 Fax: 403-527-1369
WWW.CORELUBE.COM

LEADING TECHNOLOGY IN WIRE ROPE APPLICATOR SYSTEMS.

Accommodates Wire Rope Sizes From: 7/32" (5.5mm) to 2 9/16" (65.0mm)

The CORELUBE A-1600-LB6 ADVANTAGE

- The CoreLube A-1600 System is a high pressure wire rope grease injection unit for NLGI #00, #0, #1, #2 grease.
- The Seals and Bushings snap into the housing without tools.
- Solid machined housing with dual O-ring seals.
- Removes old lubricant, dirt and grime.
- High Pressure 50:1 Pump.
- High Output Volume Pump 4.25" 108.0mm Air Motor

System Includes:

- (1) A-1600 Applicator Housing
- (1) 50:1 High Volume Pump to fits: 180 Kg Container
- (1) Drum Cover to fits: 180 Kg Container
- (1) Follow Plate fits: 180 Kg Container
- (1) Seal (any Size)
- (1) Scraper / Bushing (any size)
- (4) Shackles
- (2) Tie-Down Ratchet Straps
- (1) Hyd. Hose 3.6 Meters (12Ft.) with Fittings,
- (1) Air Regulator/Oiler with Gauge & Valve
- (1) High Pressure Discharge Valve.



Accommodates Wire Rope Diameters
From:
7/32" (5.5mm) to 2 9/16" (65.0mm)




A-1600-LB6 GREASE SYSTEM



Phone: 403-529-9645 Fax: 403-527-1369
WWW.CORELUBE.COM

LEADING TECHNOLOGY IN WIRE ROPE APPLICATOR SYSTEMS.

Accommodates Wire Rope Sizes From: 7/32" (5.5mm) to 2 9/16" (65.0mm)

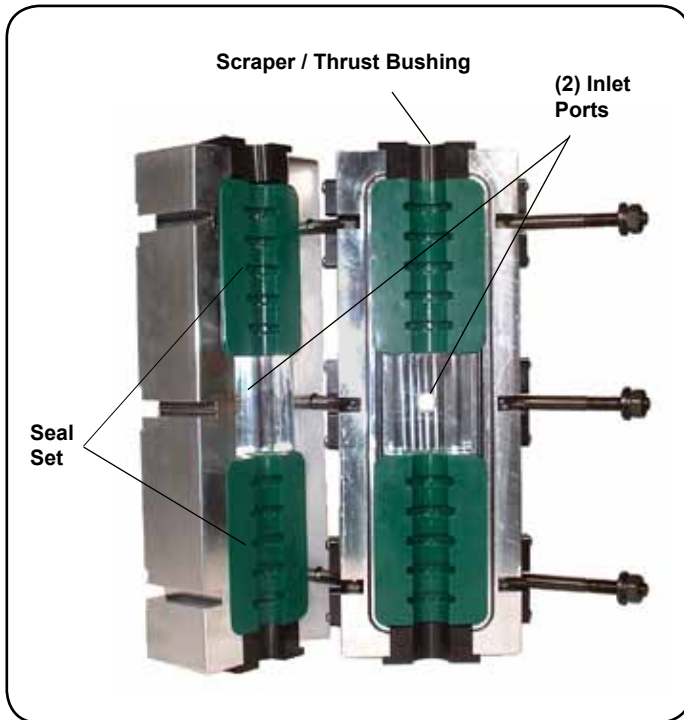


See our [A-1600 Seal Size List](#) for complete list of sizes.



OPTIONAL Wire Rope
Helix Groove Cleaners



A-1600-Housing with Groove Cleaner

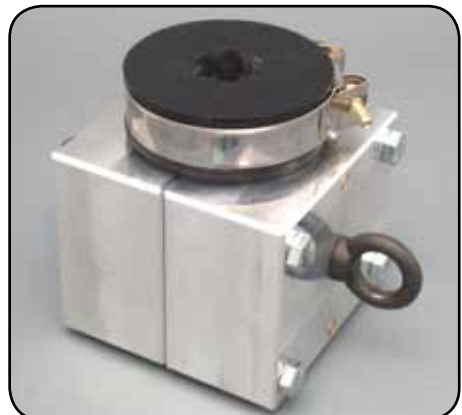

OPTIONAL Groove Cleaner
Thrust Block