




**CROSBY
RIGGING
PRODUCTS**

EYE BOLT - REGULAR

Eye Bolt - Regular

- Forged carbon steel quenched & tempered
- Hot dip galvanized
- With heavy hex nuts
- Embossed with 'OCEAN', and size to meet ASME B30.26



Dia. & Length	WLL lbs	Wt./ 100	Dimensions in				
			A	C	B	D	E
3/8 x 2 1/2	1550	23.30	0.38	1.50	2.50	0.75	1.50
3/8 x 4 1/2	1550	29.50	0.38	2.50	4.50	0.75	1.50
3/8 x 6	1550	35.20	0.38	2.50	6.00	0.75	1.50
1/2 x 3 1/4	2600	50.30	0.50	1.50	3.25	1.00	2.00
1/2 x 6	2600	66.10	0.50	3.00	6.00	1.00	2.00
1/2 x 8	2600	82.00	0.50	3.00	8.00	1.00	2.00
1/2 x 10	2600	88.00	0.50	3.00	10.00	1.00	2.00
5/8 x 4	5200	103.10	0.62	2.00	4.00	1.25	2.50
5/8 x 6	5200	118.20	0.62	3.00	6.00	1.25	2.50
5/8 x 8	5200	135.10	0.62	3.00	8.00	1.25	2.50
5/8 x 10	5200	153.60	0.62	3.00	10.00	1.25	2.50
5/8 x 12	5200	167.10	0.62	4.00	12.00	1.25	2.50
3/4 x 4 1/2	7200	168.60	0.75	2.00	4.25	1.50	3.00
3/4 x 6	7200	184.50	0.75	3.00	6.00	1.50	3.00
3/4 x 8	7200	207.90	0.75	3.00	8.00	1.50	3.00
3/4 x 10	7200	235.00	0.75	3.00	10.00	1.50	3.00
3/4 x 12	7200	257.50	0.75	4.00	12.00	1.50	3.00
1 x 12	13300	540.00	1.00	4.00	12.00	2.00	4.00

EYE BOLT - SHOULDER MACHINE

Eye Bolt - Shoulder Machine




WLL (lbs)	Shank (in)		Eye (in)		Wt./100 Pcs.
	Dia.	Length	I.D.	O.D.	
650	1/4	1	0.75	1.13	4.9
1200	5/16	1-1/8	0.88	1.38	8.5
1550	3/8	1-1/4	1.00	1.62	14.0
2600	1/2	1-1/2	1.19	1.95	29.5
5200	5/8	1-3/4	1.38	2.38	58.0
7200	3/4	2	1.50	2.76	88.5
10600	7/8	2-1/4	1.75	3.25	129.0
13300	1	2-1/2	2.00	3.76	198.5
21000	1-1/4	3	2.50	4.50	396.0
24000	1-1/2	3-1/2	3.00	5.50	654.0

EYE BOLT - SHOULDER

Eye Bolt - Shoulder

- Forged carbon steel quenched & tempered
- Hot dip galvanized
- With heavy hex nuts
- Embossed with 'OCEAN', and size to meet ASME B30.26

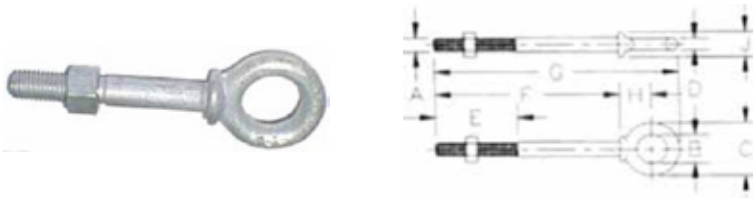

Size (in)	WLL lbs	Wt. 100	Dimensions (in)								
			A	B	C	D	E	F	G	H	J
1/4 x 2	650	6.6	0.25	0.50	0.88	0.19	1.50	2.00	2.94	0.50	0.47
1/4 x 4	650	9.1	0.25	0.50	0.88	0.19	2.50	4.00	4.94	0.50	0.47
5/16 x 2 1/4	1200	12.5	0.31	0.62	1.12	0.25	1.50	2.25	3.50	0.69	0.56
5/16 x 4 1/4	1200	18.8	0.31	0.62	1.12	0.25	2.50	4.25	5.50	0.69	0.56
3/8 x 2 1/2	1550	21.4	0.38	0.75	1.38	0.31	1.50	2.50	3.97	0.78	0.66
3/8 x 4 1/2	1550	25.3	0.38	0.75	1.38	0.31	2.50	4.50	5.97	0.78	0.66
1/2 x 3 1/4	2600	42.6	0.50	1.00	1.75	0.38	1.50	3.25	5.12	1.00	0.91
1/2 x 6	2600	56.8	0.50	1.00	1.75	0.38	3.00	6.00	7.88	1.00	0.91
5/8 x 4	5200	68.6	0.62	1.25	2.25	0.50	2.00	4.00	6.44	1.31	1.12
5/8 x 6	5200	102.4	0.62	1.25	2.25	0.50	3.00	6.00	8.44	1.31	1.12
3/4 x 4 1/2	7200	144.5	0.75	1.50	2.75	0.62	2.00	4.50	7.44	1.56	1.38
3/4 x 6	7200	167.5	0.75	1.50	2.75	0.62	3.00	6.00	8.94	1.56	1.38
7/8 x 5	10600	225.0	0.88	1.75	3.25	0.75	2.50	5.00	8.46	1.84	1.56
1 x 6	13300	366.3	1.00	2.00	3.75	0.88	3.00	6.00	9.97	2.09	1.81
1 x 9	13300	422.5	1.00	2.00	3.75	0.88	4.00	9.00	12.97	2.09	1.81
1 1/4 x 8	21000	650	1.25	2.50	4.50	1.00	4.00	8.00	12.72	2.47	2.28
1 1/4 x 12	21000	795	1.25	2.50	4.50	1.00	4.00	12.00	16.72	2.47	2.28
1 1/2 x 15	24000	1425	1.50	3.00	5.50	1.25	6.00	15.00	20.75	3.00	2.75